


-1 .



高效双单晶电池

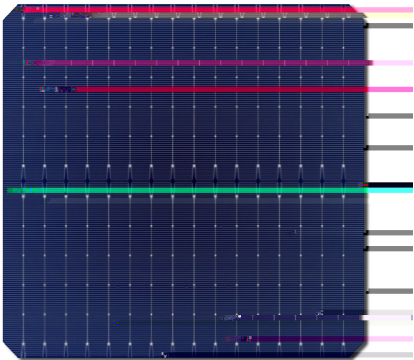

产品特性

N	B-O	0	≥25.2%	≥80%
1%				

尺寸	182 *183.75 !0.25 , 247 !0.25	: -0.26%/
厚度	145±15	: +0.046%/
正 (+)	16*0.04!0.03 主栅 (), 148根副栅 , (深) 抗反射 (化)	: -0.32%/
(-)	16*0.04!0.03 主栅 (), 120根副栅 , (深) 抗反射 (化)	50 , 2 0.8

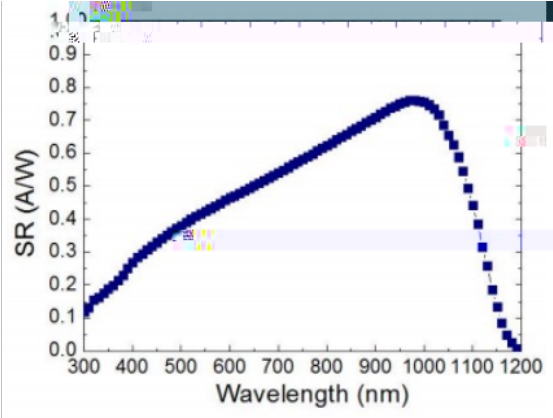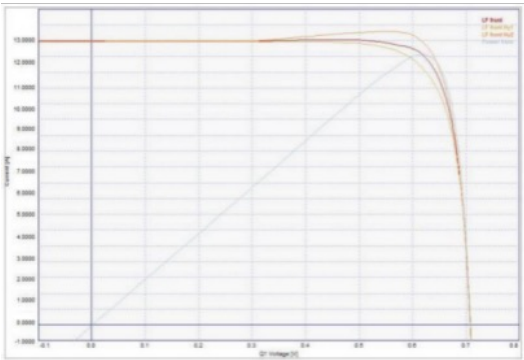

效率代	效率		最大 出	最大 出	最大 出	开 电压	电流	填充因子
	功率		电压	电压	电流			
	(%)		()	()	()	()	()	(%)
-182 -252	25.2		8.39	0.639	13.131	0.719	13.782	84.69
-182 -251	25.1		8.36	0.638	13.110	0.719	13.770	84.44
-182 -250	25.0		8.33	0.635	13.111	0.717	13.769	84.36
-182 -24	24.9		8.29	0.633	13.107	0.714	13.769	84.32
-182 -248	24.8		8.26	0.630	13.112	0.713	13.772	84.20
-182 -247	24.7		8.23	0.630	13.062	0.713	13.745	83.95
-182 -246	24.6		8.19	0.626	13.085	0.710	13.765	83.82
-182 -245	24.5		8.16	0.625	13.055	0.708	13.748	83.81
-182 -244	24.4		8.13	0.622	13.061	0.707	13.753	83.62
-182 -243	24.3		8.10	0.620	13.054	0.704	13.739	83.68
-182 -242	24.2		8.06	0.618	13.037	0.703	13.727	83.49
-182 -241	24.1		8.03	0.616	13.023	0.700	13.726	83.52
-182 -240	24.0		7.99	0.615	12.989	0.701	13.718	83.17
-182 -23	23.9		7.96	0.613	12.995	0.699	13.729	82.91
-182 -238	23.8		7.93	0.611	12.971	0.698	13.715	82.82
-182 -237	23.7		7.89	0.610	12.932	0.700	13.737	82.10

标准测 条件: 1000 / ², 1.5, 25